

# HIGH PRESSURE CONNECTORS W SERIES



## Precision modular connectors to suit your application

Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.


## Over 75000 connectors

The modular design of the LEMO range provides over 75000 connectors from miniature  $\varnothing$  3 mm to  $\varnothing$  50 mm, capable of handling cable diameters up to 30 mm and for up to 114 contacts.

This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

## LEMO's Push-Pull Self-Latching Connection System (not shown in this catalogue)



This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.

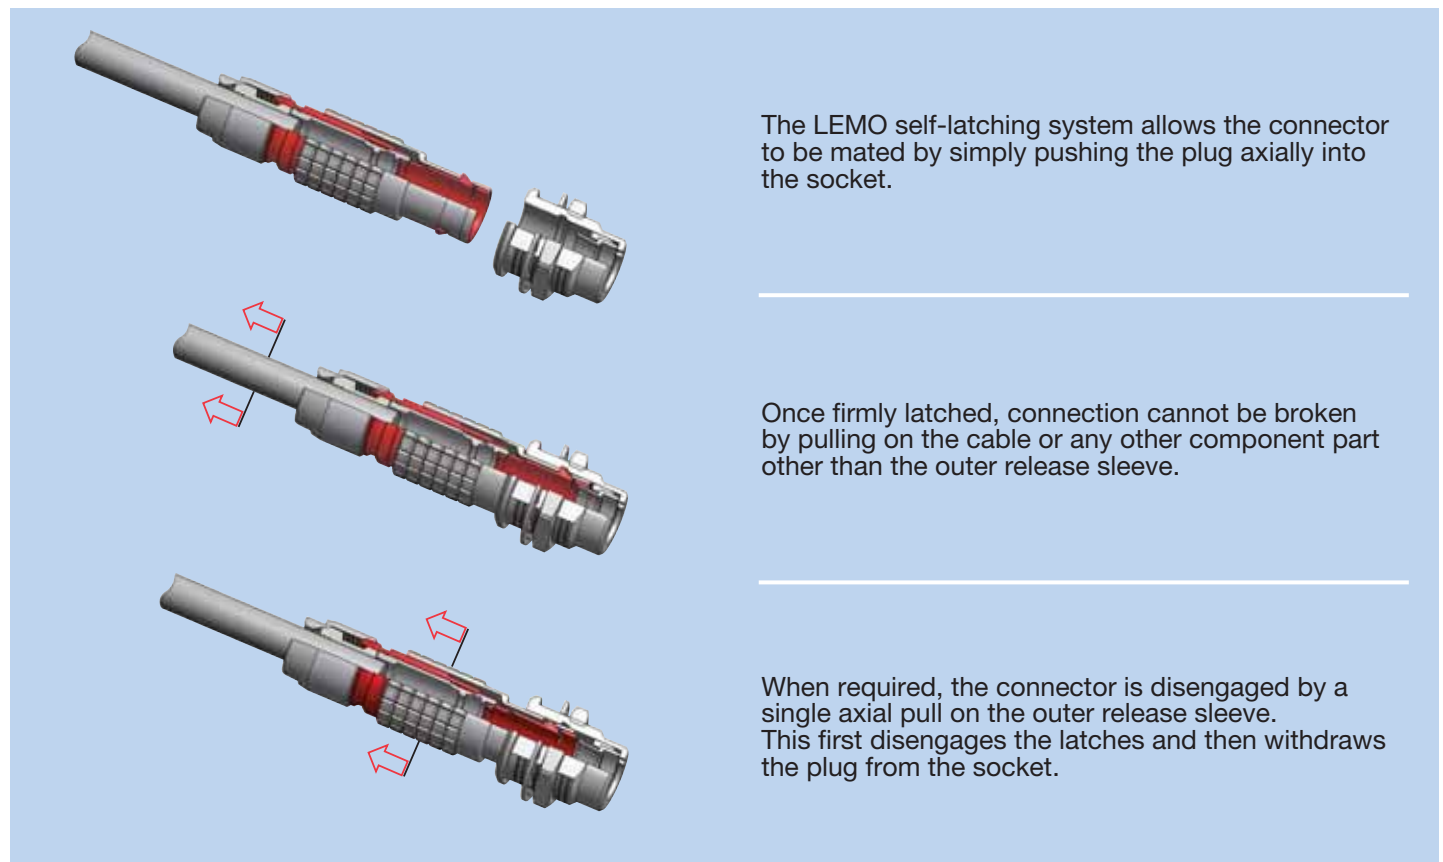

## UL Recognition

LEMO connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (LEMO connector, cable and your equipment) will be easier because LEMO connectors are recognized.

## CE marking

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

## RoHS

LEMO connector specifications conforms the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.

# W Series


W Series connectors have been developed for utilisation where protection must be guaranteed under high pressures of liquids. The basic elements, insulators, contacts and clamping system are from the B series. The push-pull latching system has been replaced by a screw coupling system with watertightness maintained by compression of an O-ring in FPM (Viton®) according to the triangular shaped cavity principle. There are multiple application possibilities ranging from nuclear physics to the petroleum industry. After cable assembly, the rear part must be covered by an adhesive heatshrink boot in order to ensure watertightness on the cable side. W series connectors provide the following main features:

- multipole types from 2 to 64 contacts
- fibre optic or mixed types available upon request
- solder or crimp contacts
- keying system («G» key standard) for connector alignment
- multiple key options to avoid cross mating of similar connectors
- 360° screening for full EMC shielding
- rugged housing for extreme working conditions.


## Interconnections

### Models (page 3)


#### Straight plugs

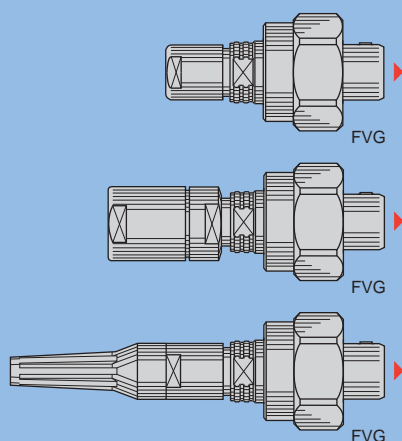

#### Fixed socket




#### Free sockets

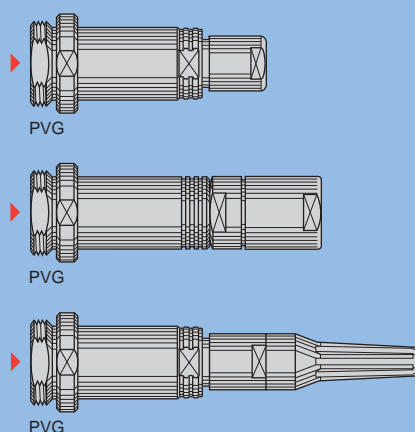

### Vacuumtight models (page 6)


#### Fixed sockets



## Part Section Showing Internal Components


#### Fixed socket

- 1 outer shell
- 2 earthing crown
- 3 retaining ring
- 4 hexagonal nut
- 5 insulator
- 6 female contact
- 7 O-ring




#### Straight plug

- 1 outer shell
- 2 coupling nut
- 3 circlip
- 4 collet nut
- 5 split insert carrier
- 6 o-ring
- 7 insulator
- 8 male contact
- 9 earthing cone
- 10 collet
- 11 gasket
- 12 washer

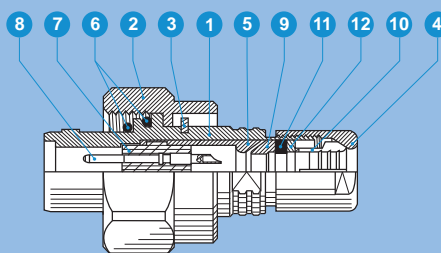


## Part Number Example

### Straight plug with cable collet

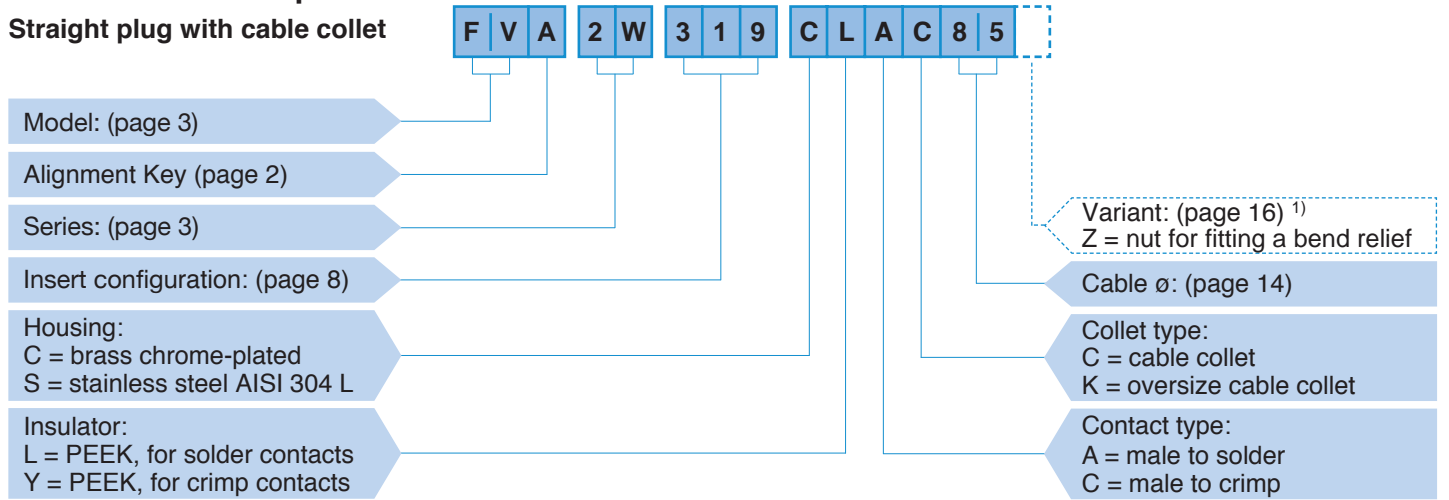

FVA.2W.319.CLAC85 = straight plug with key (A), 2W series, multipole type with 19 contacts, outer shell in chrome-plated brass, PEEK insulator, male solder contacts, C type collet for 8.5 mm diameter cable.

### Fixed socket, vacuumtight

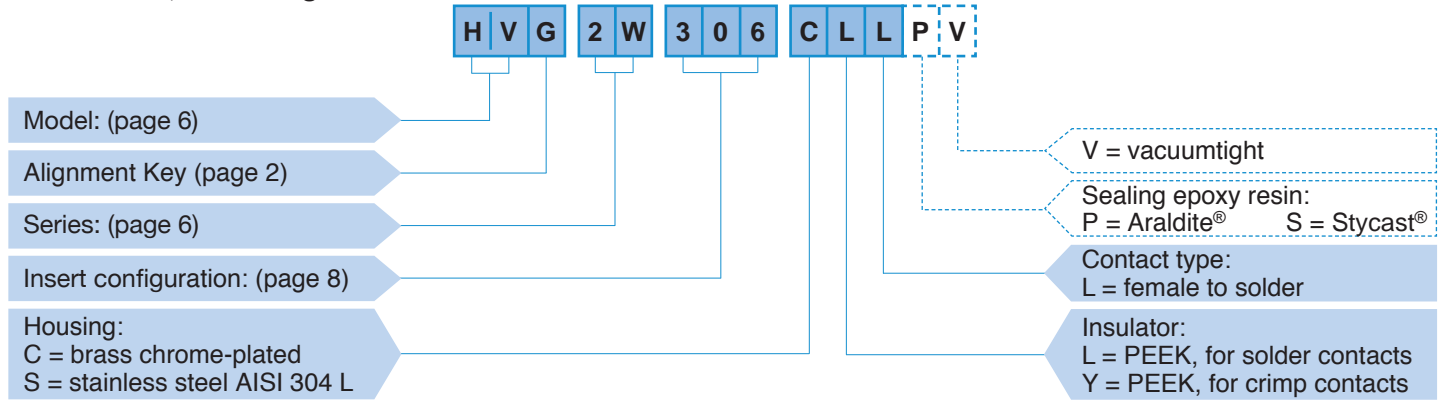

HVG.2W.306.CLLPV = fixed socket, nut fixing, key (G), 2W series, multipole type with 6 contacts, outer shell in chrome-plated brass, PEEK insulator, female solder contacts, potted with Araldite® epoxy resin, vacuumtight.

Note: <sup>1)</sup> The «Variant» position in the reference is used to specify either the presence of a collet nut for fitting the bend relief. For models with collet nut for fitting the bend relief, a «Z» should be indicated and a bend relief can be ordered separately. An order for a connector with bend relief should thus include two part numbers.



## Alignment Key and Polarized Keying System

W series connector model part numbers are composed of three letters. The LAST LETTER indicates the key position and the contact type (male or female).

Front view of a socket	Ref.	Nb of keys	Angles	Series	Contact type		Note
					Plug	Socket	
	G	1	0°	0W-5W	male	female	● Available
	A	2	α	30°	male	female	● Available
	B	2	α	45°	male	female	● Available
	L	2	γ	75°	female	male	○ On request



## Models

### Technical Characteristics

#### Mechanical and Climatical

Characteristics	Value	Standard
Endurance	> 1000 cycles	IEC 60512-5 test 9a
Temperature range	-20° C, +200° C	
Salt spray corrosion test <sup>2)</sup>	> 1000 h	IEC 60512-6 test 11f
Protection index (mated)	> IP 68	IEC 60529
Resistance to hydrostatic pressure (mated)	~ 30 bars <sup>1)</sup>	IEC 60512-7 test 14d
Climatical category	20/200/21	IEC 60068-1

#### Electrical


Characteristics		Value	Standard
Shielding efficiency	at 10 MHz	> 95 dB	IEC 60169-1-3
	at 1 GHz	> 80 dB	IEC 60169-1-3

#### Note:

<sup>1)</sup> in order to perform correctly and withstand the pressure, cable assembly shall be made according to instruction we recommend. See page 19.


<sup>2)</sup> for chrome plated product («C» material code).

#### FVG Straight plug, key (G) or keys (A, B or L), cable collet

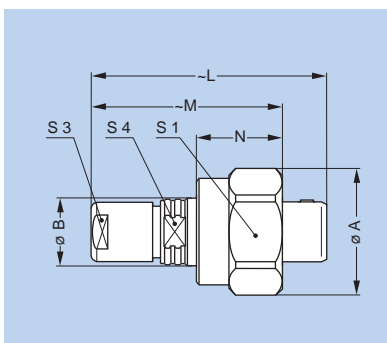

Reference		Dimensions (mm)							
Model	Series	A	B	L	M	N	S1	S3	S4
FVG	0W	17.2	10.0	36.0	30.8	13.5	16	8	8
FVG	1W	19.3	12.0	43.2	35.1	14.0	18	9	10
FVG	2W	23.5	16.0	52.5	43.0	15.5	22	12	13
FVG	3W	27.8	17.0	61.5	48.0	16.5	26	15	—
FVG	4W	34.3	22.0	71.5	57.5	17.5	32	19	—
FVG	5W	50.0	34.0	100.0	83.0	21.0	47	30	—



#### FVG Straight plug, key (G) or keys (A, B or L), oversize cable collet <sup>1)</sup>

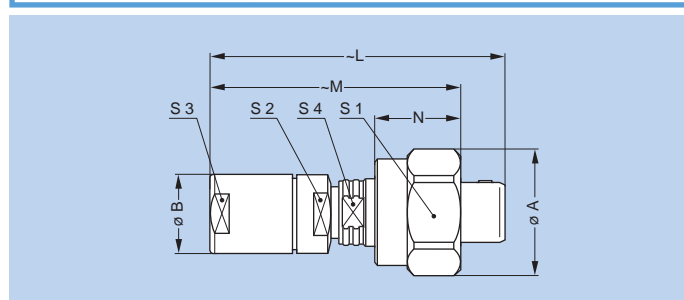

Reference		Dimensions (mm)								
Model	Series	A	B	L	M	N	S1	S2	S3	S4
FVG	1W	19.3	14.5	56.5	48.3	14.0	18	12	12	10
FVG	2W	23.5	17.0	68.5	56.0	15.5	22	15	15	13
FVG	3W	27.8	22.0	80.5	67.0	16.5	26	19	19	–
FVG	4W	34.3	36.0	105.5	91.5	17.5	32	30	32	–

**Note:** <sup>1)</sup> correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 14).


## FVG Straight plug, key (G) or keys (A, B or L), cable collet and nut for fitting a bend relief <sup>1)</sup>

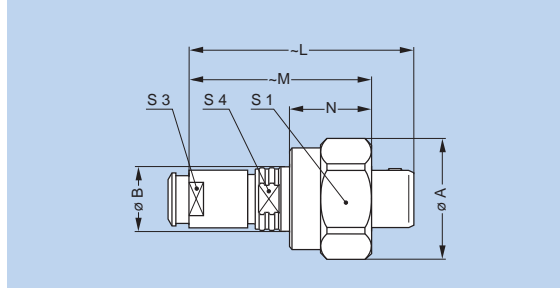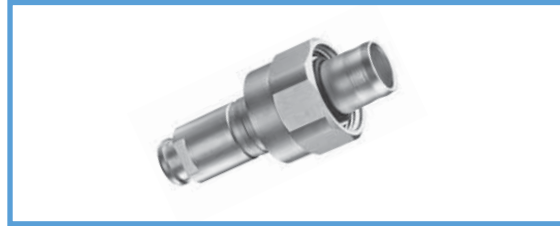

Reference		Dimensions (mm)							
Model	Series	A	B	L	M	N	S1	S3	S4
FVG	0W	17.2	10.0	36.0	30.8	13.5	16	7	8
FVG	1W	19.3	12.0	43.2	35.1	14.0	18	9	10
FVG	2W	23.5	16.0	52.5	43.0	15.5	22	12	13
FVG	3W	27.8	17.0	60.5	46.9	16.5	26	15	—
FVG	4W	34.3	22.0	71.5	57.5	17.5	32	19	—

Note: <sup>1)</sup> to order, add a «Z» at the end of the reference.  
The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog).



## FVG Straight plug, key (G) or keys (A, B or L), cable collet with special coupling nut <sup>1)</sup>

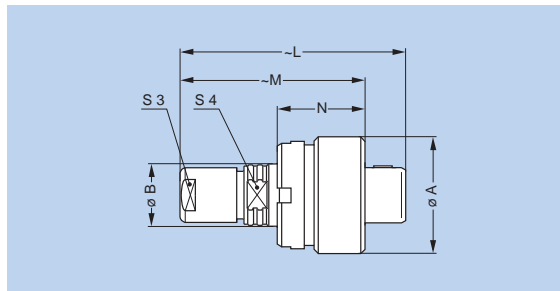

Reference		Dimensions (mm)						
Model	Series	A	B	L	M	N	S3	S4
FVG	0W	17	8.9	36.0	29.8	13.5	8	8

Note: <sup>1)</sup> to order, add a «Y» at the end of the reference.

## EVG Fixed socket, nut fixing, key (G) or keys (A, B or L)

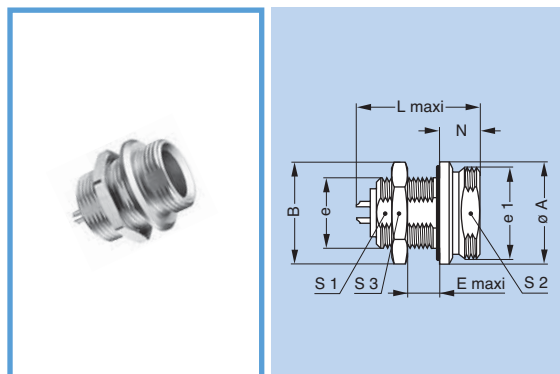


Reference		Dimensions (mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3
EVG	0W	16.2	16.0	M12x1.0	M14x1.0	4.0	21.7	8.0	10.5	12.5	14
EVG	1W	18.3	19.5	M14x1.0	M16x1.0	8.0	27.0	8.0	12.5	14.5	17
EVG	2W	22.5	21.8	M16x1.0	M20x1.0	9.0	30.7	9.0	14.5	18.5	19
EVG	3W	26.6	27.0	M20x1.0	M24x1.0	13.0	36.2	9.5	18.5	22.5	24
EVG	4W	32.8	34.2	M24x1.0	M30x1.0	15.0	40.2	9.5	22.5	28.5	30
EVG	5W	48.0	53.0	M38x1.5	M45x1.5	18.0	47.5	12.5	35.5	42.5	46

Panel cut-out (page 18)




## PVG Free socket, key (G) or keys (A, B or L), cable collet

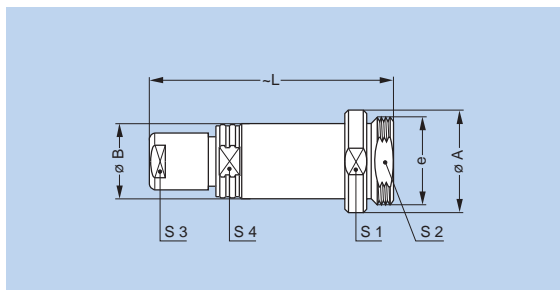

Reference		Dimensions (mm)							
Model	Series	A	B	e	L	S1	S2	S3	S4
PVG	0W	–	8.9	M14x1.0	37.9	–	13.5	8	8
PVG	1W	18.3	11.0	M16x1.0	45.0	16	14.5	9	–
PVG	2W	22.5	14.0	M20x1.0	54.0	20	18.5	12	–
PVG	3W	26.6	17.0	M24x1.0	65.0	24	22.5	15	–
PVG	4W	32.8	22.0	M30x1.0	75.5	30	28.5	19	–
PVG	5W	48.0	34.0	M45X1.5	103.0	45	42.5	30	–


## PVG Free socket, key (G) or keys (A, B or L), oversize cable collet <sup>1)</sup>

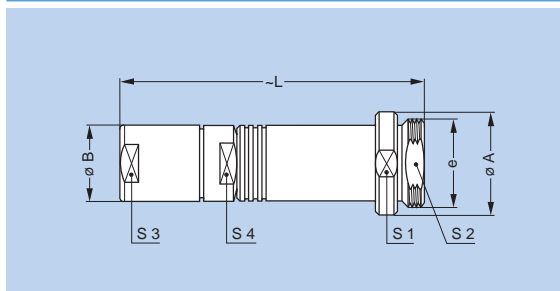

Reference		Dimensions (mm)							
Model	Series	A	B	e	L	S1	S2	S3	S4
PVG	1W	18.3	14.0	M16x1.0	58.0	16	14.5	12	12
PVG	2W	22.5	17.0	M20x1.0	67.0	20	18.5	15	15
PVG	3W	26.6	22.0	M24x1.0	84.0	24	22.5	19	19
PVG	4W	32.8	34.0	M30x1.0	109.5	30	28.5	32	30

**Note:** <sup>1)</sup> correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 14).


## PVG Free socket, key (G) or keys (A, B or L), cable collet and nut for fitting a bend relief <sup>1)</sup>

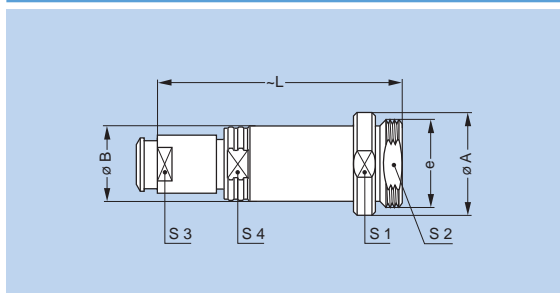

Reference		Dimensions (mm)							
Model	Series	A	B	e	L	S1	S2	S3	S4
PVG	0W	–	8.9	M14x1.0	37.9	–	13.5	7	8
PVG	1W	18.3	11.0	M16x1.0	45.0	16	14.5	9	–
PVG	2W	22.5	14.0	M20x1.0	54.0	20	18.5	12	–
PVG	3W	26.6	17.0	M24x1.0	64.0	24	22.5	15	–
PVG	4W	32.8	22.0	M30x1.0	75.5	30	28.5	19	–

**Note:** <sup>1)</sup> to order, add a «Z» at the end of the reference. The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog).





## Vacuumtight models

HRG and HVG socket models allow the device on which they are fitted to reach a protection index of IP68 as per IEC 60529. They are fully compatible with plugs of the same series and are widely used for portable radios, military, laboratory equipment, aviation, etc. These models are made in a vacuumtight version. They are identified by an additional letter «V» at the end of the part number (certificate on request).

Epoxy resin is used to seal these models and we are offering 2 different resins:

- a) Epoxy Araldite®, for general purpose use, identify with letter «P»
- b) Epoxy Stycast®, for oil and petrol industry, identify with the letter «S».

Part number example:

Vacuumtight socket potted with Araldite® epoxy:

HVG.0W.304.CLLPV

Vacuumtight socket potted with Stycast® epoxy:

HVG.0W.304.CLLSV

## Technical Characteristics

### Mechanical and Climatical

Characteristics	Value	Standard
Endurance	> 1000 cycles	IEC 60512-5 test 9a
Humidity	up to 95% at 60° C	
Temperature range (0W-1W)	- 20° C/+100° C	
Temperature range (2W to 5W)	- 20° C/+80° C	
Salt spray corrosion test <sup>3)</sup>	> 1000 h	IEC 60512-6 test 11f
Climatical category	20/80/21	IEC 60068-1
Leakage rate (He) <sup>1)</sup>	< 10 <sup>-7</sup> mbar.l.s <sup>-1</sup>	IEC 60512-7 test 14b

Characteristics	Value	Standard
Maximum operating pressure <sup>2)</sup>	0W	60 bars
	1W	60 bars
	2W	40 bars
	3W	30 bars
	4W	15 bars
	5W	5 bars


#### Note:

<sup>1)</sup> for vacuumtight models.

<sup>2)</sup> this value corresponds to the maximum allowed pressure difference for the assembled socket if used in the unmated condition.

<sup>3)</sup> for chrome plated product («C» material code).

## HVG Fixed socket, nut fixing, key (G) or keys (A, B or L), vacuumtight

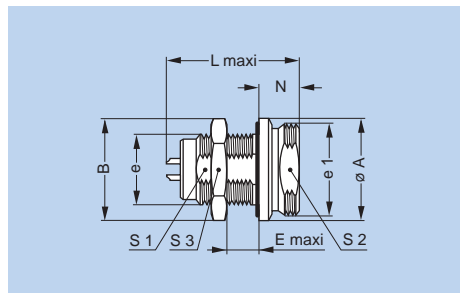


Reference		Dimensions (mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3
HVG	0W	16.2	16.0	M12x1.0	M14x1.0	5.5	24.1	8.0	10.5	12.5	14
HVG	1W	18.3	19.5	M14x1.0	M16x1.0	11.5	30.0	8.0	12.5	14.5	17
HVG	2W	22.5	21.8	M16x1.0	M20x1.0	14.5	35.8	9.0	14.5	18.5	19
HVG	3W	26.6	27.0	M20x1.0	M24x1.0	17.5	42.2	9.5	18.5	22.5	24
HVG	4W	32.8	34.2	M24x1.0	M30x1.0	20.0	48.2	9.5	22.5	28.5	30
HVG	5W	48.0	53.0	M38x1.5	M45x1.5	22.0	55.6	12.5	35.5	42.5	46

Panel cut-out (page 18)



# **HRG** Fixed socket, nut fixing, key (G) or keys (A, B or L), hexagonal flange, vacuumtight

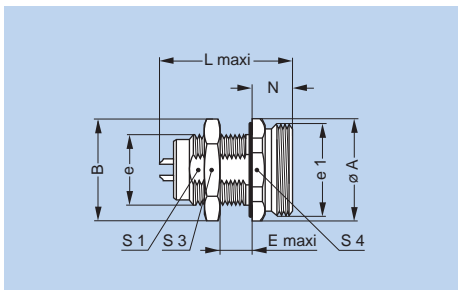

Reference		Dimensions (mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S3	S4
<b>HRG</b>	<b>OW</b>	18	16	M12x1.0	M14x1.0	5.5	24.1	8	10.5	14	17










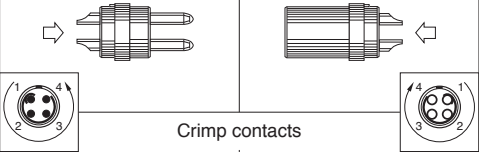

Panel cut-out (page 18)



## Insert configuration

Other like fibre optic or mixed are available, please consult us.

### Multipole

	<div>Solder contacts</div> <div></div> <div>Crimp contacts</div>		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) <sup>1)</sup>
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	
											min.	max.			
2			302	0W	0.9	●	●	●	●	20	32	20	1.00	1.05	10.0 <sup>2)</sup>
				1W	1.3	●	●	●	●	20	26	18	1.50	1.35	15.0 <sup>3)</sup>
				2W	2.0	●	●	●	●	16	18	12	2.10	1.75	25.0 <sup>3)</sup>
				3W	3.0	●	●	○		12	14	10	2.10	1.55	35.0
				5W	6.0	●				8			3.60	2.95	50.0
3			303	0W	0.9	●	●	●	●	20	32	20	1.20	0.90	8.0 <sup>2)</sup>
				1W	1.3	●	●	●	●	20	26	18	1.30	1.55	12.0
				2W	1.6	●	●	●	●	18	22	14	2.40	1.85	17.0 <sup>3)</sup>
				3W	2.0	●	●	●	○	16	18	12	1.90	1.50	25.0
4			304	0W	0.7	●	●	●	●	22	32	22	0.85	0.70	7.0 <sup>2)</sup>
				1W	0.9	●	●	●	●	22	32	20	1.35	1.45	10.0 <sup>2)</sup>
				2W	1.3	●	●	●	●	20	26	18	1.85	1.85	15.0 <sup>3)</sup>
				3W	2.0	●	●	●	●	16	18	12	1.45	1.25	19.0
				4W	3.0	●	●	○		12	14	10	2.10	1.50	30.0
				5W	4.0	●	●	○		10	12	10	2.95	2.65	35.0
5			305	0W	0.7	●	●	●	●	22	32	22	1.00	0.70	6.5 <sup>2)</sup>
				1W	0.9	●	●	●	●	22	32	20	1.25	1.15	9.0 <sup>2)</sup>
				2W	1.3	●	●	●	●	20	26	18	1.75	1.60	14.0 <sup>3)</sup>
				3W	1.6	●	●	●	○	18	22	14	1.90	1.25	19.0
6			306												
				0W	0.5	●	○ <sup>4)</sup>	●	●	28	32	28	0.85	0.65	2.5
				1W	0.7	●	●	●	●	22	32	22	1.05	1.20	7.0 <sup>2)</sup>

- First choice alternative
- Special order alternative

**Note:** <sup>1)</sup> see calculation method, caution and suggested standard.












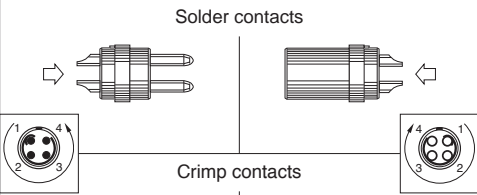

<sup>2)</sup> rated current = 6A for socket with elbow (90°) contact for printed circuit.

<sup>3)</sup> rated current = 12A for socket with elbow (90°) contact for printed circuit.

<sup>4)</sup> available only for connectors fitted with male contacts.























## Multipole

	<div>Solder contacts</div> <div></div> <div>Crimp contacts</div>		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	Rated current (A) <sup>1)</sup>
											min.	max.			
6			306	2W	1.3	●	●	●	●	20	26	18	1.35	1.45	12.0
				3W	1.6	●	●	●	○	18	22	14	1.60	1.15	17.0
				4W	2.0	●	●	○		16	18	12	2.00	1.75	24.0
7			307	0W	0.5	●	○ <sup>3)</sup>	●	●	28	32	28	0.80	0.70	2.5
				1W	0.7	●	●	●	●	22	32	22	0.95	1.05	7.0 <sup>2)</sup>
				2W	1.3	●	●	●	●	20	26	18	1.75	1.60	11.0
				3W	1.6	●	●	●	○	18	22	14	1.70	1.25	15.0
				4W	2.0	●	●	○		16	18	12	2.00	1.80	20.0
8			308												
				1W	0.7	●	●	●	●	22	32	22	0.95	1.15	5.0
8			308												
				2W	0.9	●	●	●	●	22	32	20	1.50	1.25	10.0 <sup>2)</sup>
				3W	1.3	●	●	●	●	20	26	18	1.65	1.15	13.0
9			309												
				3W	8x1.3 1x2.0	●	●	●		20 16	26 18	28 12	1.35	1.05	6.0 15.0
9			309												
				0W	0.5	●	○ <sup>3)</sup>	●	●	28	32	28	0.60	0.50	2.0

- First choice alternative  
○ Special order alternative

Note: <sup>1)</sup> see calculation method, caution and suggested standard.  
<sup>2)</sup> rated current = 6A for socket with elbow (90°) contact for printed circuit.  
<sup>3)</sup> available only for connectors fitted with male contacts.

## Multipole

	   	   	Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) <sup>1)</sup>
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	
10			310	1W	0.5	●	○ <sup>3)</sup>	●	●	28	32	28	0.90	1.50	2.5
				2W	0.9	●	●	●	●	22	32	20	1.45	1.30	8.0 <sup>2)</sup>
				3W	1.3	●	●	●	●	20	26	18	1.25	0.90	12.0
				4W	1.6	●	●	○		18	22	14	1.85	1.30	17.0
				5W	3.0	●	●	○		12	14	10	2.35	2.30	20.0
12			312	2W	0.7	●	●	●	●	22	32	22	1.25	1.35	7.0 <sup>2)</sup>
				3W	0.9	●	●	●	●	22	32	20	1.45	1.00	9.0
				4W	1.3	●	●	○		20	26	18	1.45	1.60	12.0
14			314	1W	0.5	●	○ <sup>3)</sup>	●	●	28	32	28	0.80	1.20	2.0
				2W	0.7	●	●	●	●	22	32	22	1.15	1.35	6.5 <sup>2)</sup>
				3W	0.9	●	●	●	●	22	32	20	1.20	1.20	9.0 <sup>2)</sup>
				5W	2.0	●	●	○		16	18	12	2.10	2.00	18.0
16			316												
				1W	0.5	●	○ <sup>3)</sup>	●	○	28	32	28	0.80	1.25	1.5
16			316	2W	0.7	●	●	●	●	22	32	22	0.95	1.25	6.0
				3W	0.9	●	●	●	●	22	32	20	1.20	0.85	8.0
				4W	0.9	●	●	●		22	32	20	1.35	1.50	10.0
				5W	2.0	●	●	○		16	18	12	1.85	1.95	12.0
18			318												
				2W	0.7	●	●	●	●	22	32	22	0.85	1.20	5.5
				3W	0.9	●	●	●	●	22	32	20	1.20	1.05	7.0

- First choice alternative
- Special order alternative

**Note:** <sup>1)</sup> see calculation method, caution and suggested standard.  
<sup>2)</sup> rated current = 6A for socket with elbow (90°) contact for printed circuit.  
<sup>3)</sup> available only for connectors fitted with male contacts.





















## Multipole

	<div>Solder contacts</div> <div>Crimp contacts</div>		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	Rated current (A) <sup>1)</sup>
											min.	max.			
19			319												
				2W	0.7	●	●	●	●	22	32	22	0.95	1.25	5.0
20			320												
				3W	0.7	●	●	●	●	22	32	22	1.00	0.90	6.0
20			320												
				4W	0.9	●	●	●		22	32	20	1.35	1.00	8.0
				5W	1.6	●	●	○		18	22	14	1.90	1.70	10.0
22			322												
				3W	0.7	●	●	●	○	22	32	22	1.00	0.90	5.5
24			324												
				3W	0.7	●	●	●	●	22	32	22	0.95	0.80	4.0
				4W	0.9	●	●	●		22	32	20	1.20	1.45	7.0
26			326												
				2W	0.5	●		●	○	28			0.95	1.30	2.0
				3W	0.7	●	●	●	○	22	32	22	0.95	0.70	4.0

● First choice alternative  
○ Special order alternative

Note: <sup>1)</sup> see calculation method, caution and suggested standard.

## Multipole

		<div>Solder contacts</div>		<div>Crimp contacts</div>		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) <sup>1)</sup>
									Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	
														min.	max.			
30			330															
				3W	0.7	●	●	●	●	22	32	22	0.80	0.70	3.5			
				4W	0.9	●	●	●		22	32	20	0.95	0.85	5.0			
				5W	1.3	●	●	○		20	26	18	1.45	1.60	8.0			
32			332															
				2W	0.5	●		●	○	28			0.80	1.20	1.5			
32			332															
				3W	0.7	●	○	●	○	22	32	22	0.75	0.70	3.0			
40			340															
				4W	0.7	●	●	●		22	32	22	0.90	0.90	2.0			
				5W	1.3	●	●	○		20	26	18	1.30	1.45	7.0			
48			348															
				4W	0.7	●	●	●		22	32	22	0.70	0.70	1.5			
48			348															
				5W	1.3	●	●	●		20	26	18	1.20	1.10	6.0			
50			350															
				5W	0.9	●	●	●		22	32	20	1.30	1.60	6.0			

● First choice alternative  
○ Special order alternative

Note: <sup>1)</sup> see calculation method, caution and suggested standard.



## Multipole

	<div>Solder contacts</div> <div>Crimp contacts</div>				Reference	Series	Contact ø (mm)	Contact type				AWG		Solder contact			
								Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) <sup>1)</sup> Contact-contact	Test voltage (kV rms) <sup>1)</sup> Contact-shell	Rated current (A) <sup>1)</sup>
													min.	max.			
54			354	5W	0.9	●	●	●				22	32	20	1.15	1.55	5.0
64			364	5W	0.9	●	●	●				22	32	20	1.30	1.55	3.0

- First choice alternative
- Special order alternative

Note: <sup>1)</sup> see calculation method, caution and suggested standard.





## Collets

### C and K type collets

0W, 1W, 2W and 3W series



	Reference		Collet ø		Cable ø	
	Type	Code	ø A	ø B	max.	min.
<b>0W</b>	C	10 <sup>1)</sup>	1.6	–	1.2	1.0
	C	15 <sup>1)</sup>	1.6	–	1.5	1.3
	C	20 <sup>1)</sup>	2.1	–	2.0	1.6
	C	25	3.1	–	2.5	2.1
	C	30	3.1	–	3.0	2.6
	C	35	4.2	4.2	3.5	3.1
	C	40	4.2	4.2	4.0	3.6
	C	45	5.2	5.2	4.5	4.1
	K	50	5.2	5.2	5.0	4.6
	K	55	6.2	6.2	5.5	5.1
	K	60	6.2	6.2	6.0	5.6
	K	65	7.2	6.7	6.5	6.1
<b>1W</b>	C	30	3.2	–	3.0	2.6
	C	35	4.2	–	3.5	3.1
	C	40	4.2	–	4.0	3.6
	C	45	5.2	–	4.5	4.1
	C	50	5.2	–	5.0	4.6
	C	55	6.2	6.2	5.5	5.1
	C	60	6.2	6.2	6.0	5.6
	C	65	7.2	6.7	6.5	6.1
	K	70	7.2	–	7.0	6.6
	K	75	8.2	8.2	7.5	7.1
	K	80	8.2	8.2	8.0	7.6
	K	85	9.2	8.6	8.5	8.1
<b>2W</b>	C	30	3.2	–	3.0	2.6
	C	35	4.2	–	3.5	3.1
	C	40	4.2	–	4.0	3.6
	C	45	5.2	–	4.5	4.1
	C	50	5.2	–	5.0	4.6
	C	55	6.2	–	5.5	5.1
	C	60	6.2	–	6.0	5.6
	C	65	7.2	–	6.5	6.1
	C	70	7.2	–	7.0	6.6
	C	75	8.2	–	7.5	7.1
	C	80	8.2	–	8.0	7.6
	C	85	9.2	–	8.5	8.1

	Reference		Collet ø		Cable ø	
	Type	Code	ø A	ø B	max.	min.
<b>2W</b>	C	80	8.2	8.2	8.0	7.6
	C	85	9.2	8.6	8.5	8.1
	K	90	9.2	–	9.0	8.6
	K	95	10.2	10.2	9.5	9.1
	K	10	10.2	10.2	10.0	9.6
	K	11	11.2	10.6	10.5	10.1
<b>3W</b>	C	30	3.2	–	3.0	2.6
	C	35	4.2	–	3.5	3.1
	C	40	4.2	–	4.0	3.6
	C	45	5.2	–	4.5	4.1
	C	50	5.2	–	5.0	4.6
	C	55	6.2	–	5.5	5.1
	C	60	6.2	–	6.0	5.6
	C	65	7.2	–	6.5	6.1
	C	70	7.2	–	7.0	6.6
	C	75	8.2	–	7.5	7.1
	C	80	8.2	–	8.0	7.6
	C	85	9.2	–	8.5	8.1
	C	90	9.2	–	9.0	8.6
	C	95	10.2	10.2	9.5	9.1
	C	10	10.2	10.2	10.0	9.6
	C	11	11.2	10.6	10.5	10.1
	K	11	12.3	–	12.0	10.6
	K	12	13.8	13.8	12.8	12.1
	K	13	13.8	13.8	13.5	12.9
	K	14	15.3	15.3	14.0	13.6
	K	15	15.3	15.3	15.0	14.1


**Note:** All dimensions are in millimetres.

<sup>1)</sup> the inner diameter of the smallest bend relief available is 2.5 mm (in TPU) / 1.7 mm (in silicone).



## C and K type collets

4W series




Reference		Collet ø		Cable ø	
Type	Code	ø A	ø B	max.	min.
<b>4W</b>	<b>C 50</b>	6.3	—	5.0	4.8
	<b>C 55</b>	6.3	—	5.5	5.1
	<b>C 60</b>	6.3	—	6.0	5.6
	<b>C 65</b>	7.3	—	6.5	6.1
	<b>C 70</b>	7.3	—	7.0	6.6
	<b>C 75</b>	8.3	—	7.5	7.1
	<b>C 80</b>	8.3	—	8.0	7.6
	<b>C 85</b>	9.3	—	8.5	8.1
	<b>C 90</b>	9.3	—	9.0	8.6
	<b>C 95</b>	10.8	—	9.5	9.1
	<b>C 10</b>	10.8	—	10.5	9.6
	<b>C 11</b>	12.3	—	12.0	10.6
	<b>C 12</b>	13.8	13.8	12.8	12.1
	<b>C 13</b>	13.8	13.8	13.5	12.9
	<b>C 14</b>	15.3	15.3	14.0	13.6
	<b>C 15</b>	15.3	15.3	15.0	14.1
	<b>K 16</b>	17.8	—	16.5	15.6
	<b>K 17</b>	17.8	—	17.5	16.6
	<b>K 18</b>	19.8	—	18.5	17.6
	<b>K 19</b>	19.8	—	19.5	18.6
	<b>K 20</b>	21.8	—	20.5	19.6
	<b>K 21</b>	21.8	—	21.5	20.6
	<b>K 22</b>	23.8	23.8	22.5	21.6
	<b>K 23</b>	23.8	23.8	23.5	22.6

5W series







Reference		Collet ø		Cable ø	
Type	Code	ø A	ø B	max.	min.
<b>5W</b>	<b>C 10</b>	11.8	—	10.5	9.6
	<b>C 11</b>	11.8	—	11.5	10.6
	<b>C 12</b>	13.8	—	12.5	11.6
	<b>C 13</b>	13.8	—	13.5	12.6
	<b>C 14</b>	15.8	—	14.5	13.6
	<b>C 15</b>	15.8	—	15.5	14.6
	<b>C 16</b>	17.8	—	16.5	15.6
	<b>C 17</b>	17.8	—	17.5	16.6
	<b>C 18</b>	19.8	—	18.5	17.6
	<b>C 19</b>	19.8	—	19.5	18.6
	<b>C 20</b>	21.8	—	20.5	19.6
	<b>C 21</b>	21.8	—	21.5	20.6
	<b>C 22</b>	23.8	23.8	22.5	21.6
	<b>C 23</b>	23.8	23.8	23.5	22.6



Variant


Bend relief for W series models with collet

Need to be ordered					Need to be ordered				
									
Ref.		Collet		Need to be ordered separately	Ref.		Collet		Need to be ordered separately
		Type	Code				Type	Code	
0W	z	C	30 to 45	GMA.0B.●●●●●●	3W	z	C	30 to 10	GMA.3B.●●●●●●
		K	50	GMA.1B.●●●●●●			K	11 to 15	GMA.4B.●●●●●●
1W	z	C	30 to 65	GMA.1B.●●●●●●	4W	z	C	50 to 15	GMA.4B.●●●●●●
		K	70 to 85	GMA.2B.●●●●●●					
2W	z	C	30 to 85	GMA.2B.●●●●●●					
		K	90 to 10	GMA.3B.●●●●●●					

**Note:** The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog). All dimensions are in millimetres.

Accessories

BFG Plug caps with key (G) (IP68 and resistance to hydrostatic pressure 30 bars)

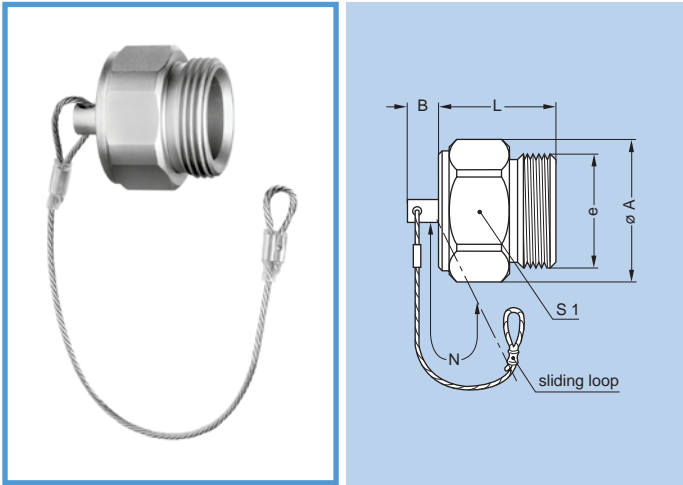


Part number	Series	Dimensions (mm)					
		A	B	e	L	N <sup>1)</sup>	S1
BFG.0W.100.●AZ	0W	17.2	6	M14x1.0	12.5	85	16
BFG.1W.100.●AZ	1W	19.3	6	M16x1.0	15.5	85	18
BFG.2W.100.●AZ	2W	23.5	6	M20x1.0	17.5	85	22
BFG.3W.100.●AZ	3W	27.8	6	M24x1.0	22.0	120	26
BFG.4W.100.●AZ	4W	34.3	10	M30x1.0	22.5	120	32
BFG.5W.100.●AZ	5W	50.0	10	M45x1.5	27.0	120	47

**Note:** 1) the tolerance on this dimension is ± 5 mm.

- Body material: ● = N, nickel-plated brass (Ni 3µm)  
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass

## BRE Blanking caps for fixed sockets (This cap is only IP68 when installed)

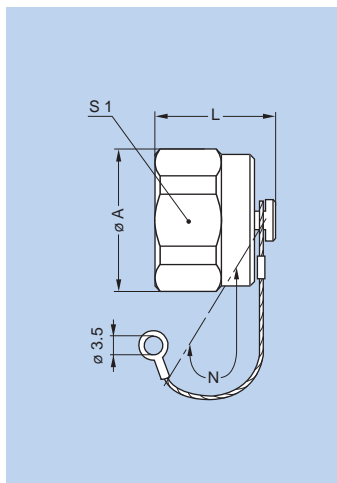


Part number	Series	Dimensions (mm)			
		A	L	N <sup>1)</sup>	S1
<b>BRE.0V.200.●AV</b>	0W	17.2	13.7	85	16
<b>BRE.1V.200.●AV</b>	1W	19.3	13.7	85	18
<b>BRE.2V.200.●AV</b>	2W	23.5	14.7	85	22
<b>BRE.3V.200.●AV</b>	3W	27.8	14.7	120	26
<b>BRE.4V.200.●AV</b>	4W	34.3	14.7	120	32
<b>BRE.5V.200.●AV</b>	5W	50.0	16.2	120	47

**Note:** 1) the tolerance on this dimension is  $\pm 5$  mm.

- Body material: ● = N, nickel-plated brass (Ni 3 $\mu$ m)  
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

## BRF Blanking caps for free sockets (This cap is only IP68 when installed)

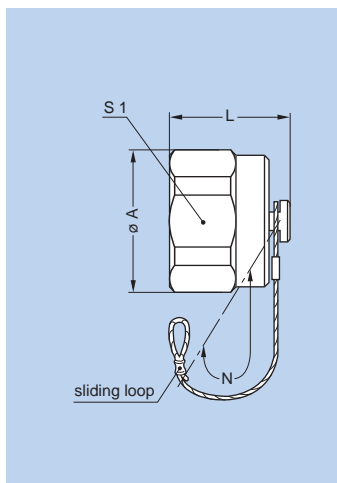


Part number	Series	Dimensions (mm)			
		A	L	N <sup>1)</sup>	S1
<b>BRF.0V.200.●AV</b>	0W	17.2	13.7	85	16
<b>BRF.1V.200.●AV</b>	1W	19.3	13.7	85	18
<b>BRF.2V.200.●AV</b>	2W	23.5	14.7	85	22
<b>BRF.3V.200.●AV</b>	3W	27.8	14.7	120	26
<b>BRF.4V.200.●AV</b>	4W	34.3	14.7	120	32
<b>BRF.5V.200.●AV</b>	5W	50.0	16.2	120	47

**Note:** 1) the tolerance on this dimension is  $\pm 5$  mm.

- Body material: ● = N, nickel-plated brass (Ni 3 $\mu$ m)  
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

## GEA Hexagonal nuts




- Material:
  - Nickel-plated brass (3  $\mu$ m)
  - Stainless steel

Part number	Series	Dimensions (mm)			
		A	B	e	L
<b>GEA.1S.240.LN</b>	0W	14	15.8	M12 x 1.00	2.5
<b>GEA.0E.240.LN</b>	1W	17	19.2	M14 x 1.00	2.5
<b>GEA.1E.240.LN</b>	2W	19	21.5	M16 x 1.00	3.0
<b>GEA.2E.240.LN</b>	3W	24	27.0	M20 x 1.00	4.0
<b>GEA.3E.240.LN</b>	4W	30	34.0	M24 x 1.00	5.0
<b>GEA.5W.240.LN</b>	5W	46	53.0	M38 x 1.50	8.0

**Note:** to order this part separately, use the above part numbers. The last letters «LN» of the part number refer to the nut material and treatment. If a nut in stainless steel is desired, replace the last letters of the part number by «AZ».

GDA O-ring for plug

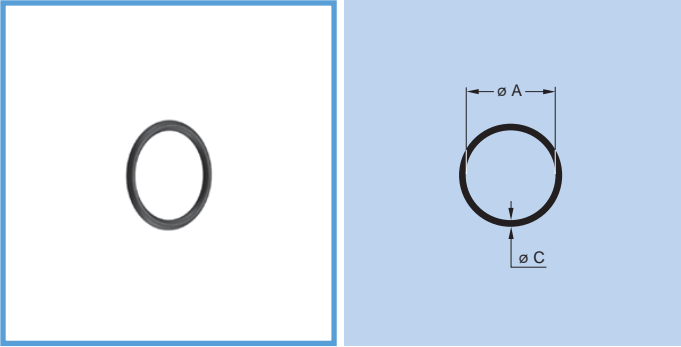


Part number	Series	Dim. (mm)	
		A	C
GDA.99.070.100VK	0W	7.0	1.00
GDA.99.090.125VK	1W	9.0	1.25
GDA.99.120.150VK	2W	12.0	1.50
GDA.99.150.150VK	3W	15.0	1.50
GDA.99.190.200VK	4W	19.0	2.00
GDA.99.310.250VK	5W	31.0	2.50

● Material: FPM (Viton®)

Panel cut-outs

Panel Cut-outs

EVG, HRG, HVG

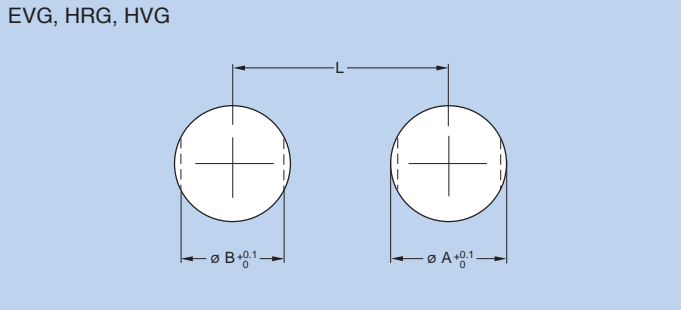

Series	Dimensions (mm)		
	A	B	L
0W	12.1	10.6	19.0
1W	14.1	12.6	21.0
2W	16.1	14.6	25.5
3W	20.2	18.6	30.0
4W	24.2	22.6	37.0
5W	38.2	35.6	53.0

Mounting nuts torque

Component	Torque (Nm)					
	0W	1W	2W	3W	4W	5W
Collet nut for F●● and P●●	0.7	0.8	2	3	5	8
Mounting hex nut for sockets	5	7	9	12	17	22
Coupling nut	0.7	0.8	2	3	5	8

1N = 0.102 kg

## Cable assembly

### Assembly instructions

In order to ensure the sealing of plugs and sockets on the cable side, it is imperatively necessary to complete their assembly by realizing it with an adapted technique. We recommend the fitting of an heatshrink boot with inner melting coating of type ATUM (manufactured by the RAYCHEM company) or similar.

**This heatshrink boot is not provided with the connector. Please consult us.**

---

## Product safety notice

**PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION. IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.**

### 1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock.

Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

### 2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.

Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

### 3. USE


Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.


### 4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

### 5. CE MARKING

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.

CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

### 6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

### 7. **WARNING (Prop 65 State of California)**

Proposition 65 requires businesses to provide warnings to Californians about significant exposures to chemicals that cause cancer, birth defects or other reproductive harm. LEMO products are exempt from proposition 65 warnings because they are manufactured, marketed, and sold solely for commercial and industrial use. For further information, please visit <https://www.lemo.com/quality/LEMO-Prop-65-compliance-declaration.pdf>.

## Disclaimers

LEMO works constantly to improve the quality of its products; the information and illustrations figuring in this document may therefore vary and are not binding. In any case, LEMO makes no specific warranty of merchantability, fitness for a particular purpose, third party components as such or included in assembly, non-infringement, title, accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO component.

In no event shall LEMO, its affiliates, officers, agents or employees be liable for any incidental, indirect, special or consequential damages in connection with the products or services provided by LEMO, including (without limitation) loss of profits or revenues, interruption of business, loss of use of the products or any associated equipment, materials, components or products, damages to associated equipment or in combination with other components, materials.

Reproduction of significant portions of LEMO information in LEMO data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. LEMO is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.



LEMO complete product range

	B	S	K	E	F	00	01	0A	3T	4A	4M	3K.93C	1D	Y	05	5G	2G	2C	L	H	R	N	03	V	W	U	T7	P	D	K/S	01	DIN
Unipole																																
Multipole																																
Coaxial 50 Ω																																
Coaxial 75 Ω																																
Multi Coaxial																																
Mixed Coax + LV																																
Triaxial 50 Ω																																
Triaxial 75 Ω																																
Mixed Triax + LV																																
Quadrax																																
High Voltage																																
Multi High Voltage																																
Mixed HV + LV																																
Fibre Optic																																
Multi Fibre Optic																																
Mixed FO + LV																																
Thermocouple																																
Fluidic																																
Multi Fluidic																																
Mixed Fluidic + LV																																

Most frequently used in darker colour

• included in this catalogue

B Series Keyed	S Series	K Series Keyed	E Series	F Series Keyed	00 Series	01 Series
						
0A Series	3T Series	4A Series	4M Series Keyed	3K.93C Series Keyed	1D Series	Y Series
						
05 Series	5G Series Keyed	2G Series Keyed	2C Series	L Series Keyed	H Series	M Series Keyed
						
R Series Keyed	N Series Keyed	03 Series Keyed	V Series	W Series Keyed	Cable assembly	K/S Series Keyed
						
REDEL T7 Series	REDEL P Series Keyed	REDEL D Series	01 Series Keyed	VAA Series	SAA Series	TAA Series
						

## LEMO HEADQUARTERS

### SWITZERLAND

#### LEMO SA

Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens  
Tel. (+41 21) 695 16 00 - Fax (+41 21) 695 16 02 - e-mail: info@lemo.com

## LEMO SUBSIDIARIES

### AUSTRIA

#### LEMO Elektronik GesmbH

Lemböckgasse 49/E6-3  
1230 Wien  
Tel: (+43 1) 914 23 20 0  
Fax: (+43 1) 914 23 20 11  
salesAT@lemo.at

### BRAZIL

#### LEMO Latin America Ltda

Av. José Rocha Bonfim,  
214 Salas 224 / 225  
Condominio Praça Capital  
Ed. Chicago  
Campinas / SP - Brasil 13080-650  
Tel: +55 (11) 98689 4736  
info-la@lemo.com

### CANADA

#### LEMO Canada Inc

44 East Beaver Creek Road, unit 20  
Richmond Hill, Ontario L4B 1G8  
Tel: (+1 905) 889 56 78  
Fax: (+1 905) 889 49 70  
info-canada@lemo.com

### CHINA / HONG KONG

#### LEMO Electronics (Shanghai) Co., Ltd

First Floor, Block E,  
18 Jindian Road, Pudong  
Shanghai, China, 201206  
Tel: (+86 21) 5899 7721  
Fax: (+86 21) 5899 7727  
cn.sales@lemo.com

### DENMARK

#### LEMO Denmark A/S

Mandal Allé 16A  
5500 Middelfart  
Tel: (+45) 45 20 44 00  
Fax: (+45) 45 20 44 01  
info-dk@lemo.com

### FRANCE

#### LEMO France Sàrl

24/28 Avenue Graham Bell  
Bâtiment Balthus 4  
Bussy Saint Georges  
77607 Marne la Vallée Cedex 3  
Tel: (+33 1) 60 94 60 94  
Fax: (+33 1) 60 94 60 90  
info-fr@lemo.com

### GERMANY

#### LEMO Elektronik GmbH

Hanns-Schwindt-Str. 6  
81829 München  
Tel: (+49 89) 42 77 03  
Fax: (+49 89) 420 21 92  
info@lemo.de

### HUNGARY

#### REDEL Elektronika Kft

Nagysándor József u. 6-12  
1201 Budapest  
Tel: (+36 1) 421 47 10  
Fax: (+36 1) 421 47 57  
info-hu@lemo.com

### ITALY

#### LEMO Italia srl

Viale Lunigiana 25  
20125 Milano  
Tel: (+39 02) 66 71 10 46  
Fax: (+39 02) 37 90 80 46  
sales.it@lemo.com

### JAPAN

#### LEMO Japan Ltd

2-7-22, Mita,  
Minato-ku, Tokyo, 108-0073  
Tel: (+81 3) 54 46 55 10  
Fax: (+81 3) 54 46 55 11  
info-jp@lemo.com

### MIDDLE EAST

#### LEMO Middle East Connectors LLC

Concorde Tower 6th Floor,  
Dubai Media City, P.O. Box 126732  
Dubai, United Arab Emirates  
Tel: +971 55 222 36 77  
info-me@lemo.com

### NETHERLANDS / BELGIUM

#### LEMO Connectors Nederland B.V.

Jacques Meuwissenweg 6  
2031 AD Haarlem  
Tel. +31 23 206 07 01  
info-nl@lemo.com

### NORWAY / ICELAND

#### LEMO Norway A/S

Soerumsandvegen 69,  
1920 Soerumsand  
Tel: (+47) 22 91 70 40  
Fax: (+47) 22 91 70 41  
info-no@lemo.com

### SINGAPORE

#### LEMO Asia Pte Ltd

4 Leng Kee Road,  
#06-09 SiS Building  
Singapore 159088  
Tel: (+65) 6476 0672  
Fax: (+65) 6474 0672  
sg.sales@lemo.com

### SPAIN / PORTUGAL

#### IBERLEMO SAU

Brasil, 45, 08402 Granollers  
Barcelona  
Tel: (+34 93) 860 44 20  
Fax: (+34 93) 879 10 77  
info-es@lemo.com

### SWEDEN / FINLAND

#### LEMO Nordic AB

Gunnabogatan 30, Box 8201  
163 08 Spånga  
Tel: (+46 8) 635 60 60  
Fax: (+46 8) 635 60 61  
info-se@lemo.com

### SWITZERLAND

#### LEMO Verkauf AG

Grundstrasse 22 B, 6343 Rotkreuz  
Tel: (+41 41) 790 49 40  
ch.sales@lemo.com

### UNITED KINGDOM

#### LEMO UK Ltd

12-20 North Street, Worthing,  
West Sussex, BN11 1DU  
Tel: (+44 1903) 23 45 43  
lemouk@lemo.com

### USA

#### LEMO USA Inc

P.O. Box 2408  
Rohnert Park, CA 94927-2408  
Tel: (+1 707) 578 88 11  
(+1 800) 444 53 66  
Fax: (+1 707) 578 08 69  
info-US@lemo.com

## LEMO DISTRIBUTORS

ARGENTINA, AUSTRALIA, BRAZIL, CHILE, COLOMBIA, CZECH REPUBLIC,  
GREECE, INDIA, ISRAEL, NEW ZEALAND, PERU, POLAND, RUSSIA,  
SOUTH AFRICA, SOUTH KOREA, TAIWAN, TURKEY, UKRAINE

[www.lemo.com](http://www.lemo.com)

