


产品代号 Part code	产品料号 Part NO.	重量/Weight			线径/Wire Gauge		剥线长度 Stripping length
		g	mm ²	AWG	d	D	
CMM-1.5	2040001015	2.98	1.5	16	1.75	3	9
CMM-2.5	2040001025	3.08	2.5	14	2.25	3.5	9
CMM-4.0	2040001040	3.1	4	12	2.85	3.9	9.6
CMM-6.0	2040001060	3.18	6	10	3.5	5	9.6

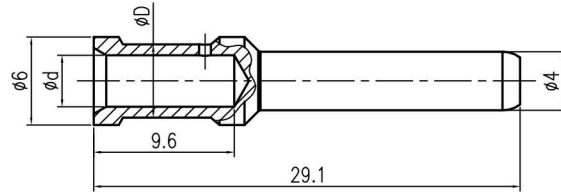


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 40A
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围: $1.5\text{--}10\text{mm}^2$ (16-8 AWG)
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 40A
- Contact resistance: $\leq 1\text{m}\Omega$
- Wire gauge: $1.5\text{--}10\text{mm}^2$ (16-8 AWG)
- Mating cycles: ≥ 500



						表面处理 Finish		-		图号 Drawing No.	-		
						材料 Material		-		产品代号 Part Code	CCSM-XX		
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale		版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.	-
绘图 Drawn		姓名/Name	日期/Date	姓名/Name	日期/Date	2:1	V1.0	-	-	产品名称 Part Name		-	
审核 Checked			18.10.2010	标准化 Stand.	-								
工艺 Process		-	-	批准 Approved			18.10.2010			浙江西霸士电气有限公司			