


HBS1-AGQ 金属按钮系列



型号说明 Model Explanation

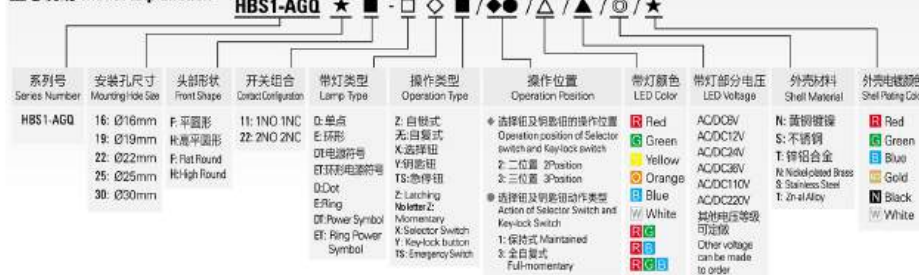

性能参数 Parameters

开关额定值	Switch Rating	AC: 5A/250V
环境温度	Operating Temperature	-40℃ ~ +80℃
接触电阻	Contact Resistance	≤ 50mΩ
绝缘电阻	Insulation Resistance	≥ 1000MΩ
介电强度	Dielectric Strength	AC1780V
机械寿命	Mechanical Life	≥ 1,000,000次
电气寿命	Electrical Life	≥ 50,000次
开关结构	Contact Type	单触点快动触头 Single-break fast motion changeover contact
开关组合	Contact Configuration	1NO 1NC / 2NO 2NC
表面防爆等级	Explosion proof grade	IK08(针对金属材质)
防护等级	Degree of Protection	IP 67
操作压力	Operating Pressure	≤ 50N
操作行程	Operating Stroke	3mm
螺母扭矩	Screw Torque	5~14N
外壳	Shell material	黄铜镀镍/不锈钢 Nickel-plated Brass/Stainless Steel
材质	Material	按钮 Press key material: 不锈钢 Stainless steel 底座 Base material: 塑料底座 Plastic base 触点 Contact material: 银合金 Silver alloy

LED灯珠规格 LED Lamp Specifications

灯珠类型	Lamp Type	双向LED灯珠(交流通用) Bi-directional LED lamp (AC DC Universal)
额定电压	Rated Voltage	1.8V、2.8V、6V、12V、24V、36V、110V、220V
额定电流	Rated Current	约15mA about 15mA
发光颜色	Color	红 Red, 绿 Green, 蓝 Blue, 白 White, 黄 Yellow, 紫 Purple, 橙 Orange, 粉 Pink
寿命	Life	50000小时(参考值) 50000 hours (reference value)


注: 如需单向直流LED灯珠可定制; 其他电压规格可按要求定制。
Note: Unidirectional DC LED lamp can be customized if needed; other voltage specifications could be special made.



开关结构说明 Switch Structure Explanation

型式 Type	符号 Symbol	示意图 Diagram	说明 Explanation
C	NO NC		具有三个端子的单触点快动转换触头开关 Single breakpoint fast moving contact switch with three terminals.

引脚说明 Pin Description

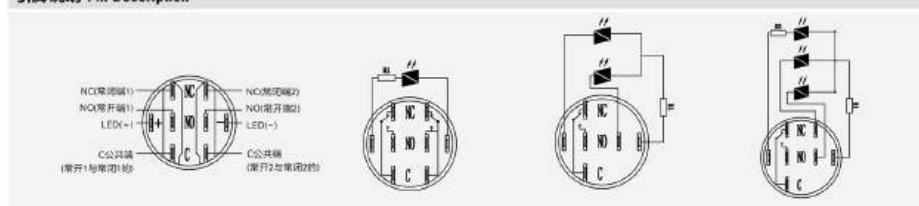

HBS1-AGQ Series Metal Pushbutton Switches



部分产品焊接注意事项 Welding Precautions

任何不正确的焊接操作都可能导致产品塑料变形、开关接触不良等。用户在使用引脚式按钮开关、信号灯时, 因焊接不当导致产品损坏的现象时有发生, 故敬请各位用户在接线操作时务必注意以下几点:

- 选择合适电烙铁, 加快焊接速度, 建议使用30W以下电烙铁在320℃时2秒内完成焊接。
- 助焊剂必须适量, 焊接时尽量将开关引脚朝下。
- 尽量采用插线端子连接, 避免焊接连接。

Any improper welding operation may lead to product plastic deformation, poor switch contact. Users using pin-type button switches, lights, due to improper welding damage to the product. Phenomenon occurs from time to time, so please be sure to pay attention to the following points in the wiring operation:


- Choose the right electric iron, speed up the welding speed, it is recommended to use the following 30W electric iron at 320 °C When 2 seconds to finish welding.
- Flux must be moderate, try to switch the pin down when welding.
- Try to use plug-in terminals to avoid welding connections.

防护与安装说明 Protection and installation instructions


金属按钮开关外壳采用金属材料, 与塑料开关相比, 不家增强了其美观性, 外观颜色可多样化, 并且大幅度提升了头部安装面板以上其防水性能、防腐性能及耐腐蚀性等。防水等级IP65, 防腐能力IK08。

Pushbutton use metal housing, not only the appearance would be more beautiful and multi-colorful, compared with plastic indicator, but also enhance the dustproof and waterproof, explosion resistance and corrosion resistance performance of the head (above the panel mount), etc. IP65 waterproof, Explosion-proof IK08.

内部P防尘、防水结构



外部O型密封圈安装方法

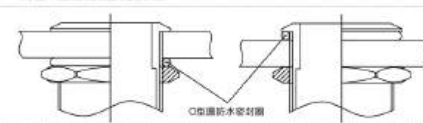

标识定做 Identification custom

金属按钮开关的按键表面可以激光刻字, 图案或发光文字与图案, 可根据客户要求定制。具有新颖与美观性, 并替代指示标识的作用。

The surface of the key metal button switch, can be laser engraving patterns or luminous words and patterns, can be customized according to customer requirements, with novel and beautiful appearance, and replace the role of signs.

激光刻字效果图



激光刻穿发光效果图



符号定制举例



配套接插件型号说明 The mating connector model description


配套接插件具有快速安装、快速拆卸、方便操作、导电性能优越、保护按钮开关插脚、美观等诸多特点, 是按钮开关配套必不可少的组件。

The mating connector with fast installation, remove the fast, convenient operation, reliable connection, a superior conductivity, button switch pins, beautiful etc. many characteristics, is the button switch kit essential components.

连接效果图



连接尺寸图

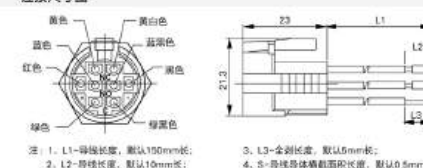

注: 配套连接器与按钮为分开采购, 且连接器不单独零售。
Note: the matching connector and button are purchased separately, and the connector does not retail separately.

安装效果预览 Installation Effect Preview

